



PMAC ブラシモータ / PMAC Brush motor

IGモータ / IG motor

Series No.

**SN3658**

(HIGH VOLTAGE)


用途例/Application example

ハンディマッサージャ / Handy massager



重さ/Weight :210g (Approx.)

寸法/Dimensions (mm)

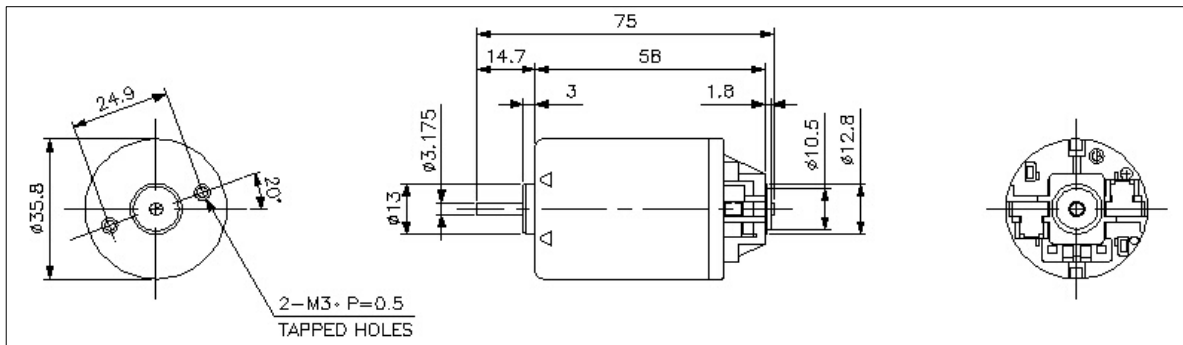


性能/Performance

ご要望により整流器の内臓も可能です/ Built-in rectifier is available when required.

| Model Name       | No load |       |         | Max Efficiency |       |         |        |     | Stall  |         |
|------------------|---------|-------|---------|----------------|-------|---------|--------|-----|--------|---------|
|                  | Voltage | Speed | Current | Torque         | Speed | Current | Output | Eff | Torque | Current |
|                  | V       | rpm   | A       | mN-m           | rpm   | A       | W      | %   | mN-m   | A       |
| SN3658-220-GF-12 | AC120   | 6600  | DC 0.03 | 17.21          | 5020  | DC 0.11 | 9.07   | 52  | 79.7   | DC 0.41 |

特性カーブ/Characteristic curves

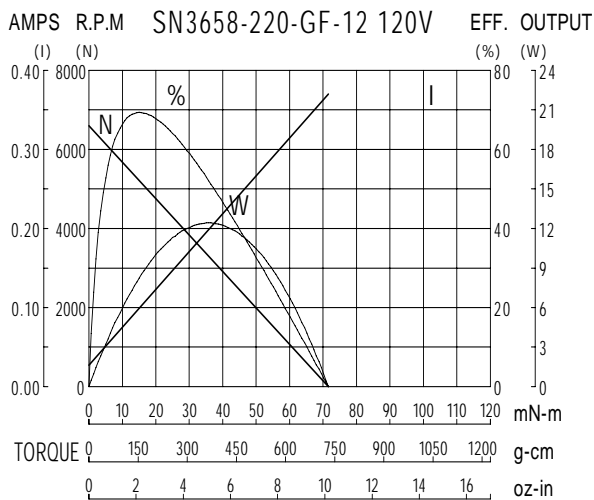

本カタログは、外形図、性能などの一部の例を掲載しております。お客様の御要望に応じ、巻線変更、などのご相談に応じております。  
The data shown in this catalog is reference purpose only. Customization to meet individual requirements is available.